Soil Quality Information Sheet

Soil Quality Resource Concerns:

Available Water Capacity

USDA Natural Resources Conservation Service **January 1998**

What is available water capacity?

Available water capacity is the amount of water that a soil can store that is available for use by plants.

It is the water held between field capacity and the wilting point adjusted downward for rock fragments and for salts in solution. Field capacity is the water retained in a freely drained soil about 2 days after thorough wetting. The wilting point is the water content at which sunflower seedlings wilt irreversibly.

Why be concerned?

In areas where drizzle falls daily and supplies the soils with as much or more water than is removed by plants, available water capacity is of little importance. In areas where plants remove more water than the amount supplied by precipitation, the amount of available water that the soil can supply may be critical. This water is necessary to sustain the plants between rainfall events or periods of irrigation. The soil effectively buffers the plant root environment against periods of water deficit.

How is available water expressed?

Available water is expressed as a volume fraction (0.20), as a percentage (20%), or as an amount (in inches). An example of a volume fraction is water in inches per inch of soil. If a soil has an available water fraction of 0.20, a 10 inch zone then contains 2 inches of available water.

Available water capacity is often stated for a common depth of rooting (where 80 percent of the roots occur). This depth is at 60 inches or more in areas of the western United States that are irrigated and at 40 inches in the higher rainfall areas of the eastern United States. Some publications use classes of available water capacity. These classes are specific to the area in which they are used. Classes use such terms as very high, high, medium, and low.

Soil properties affect available water

Rock fragments reduce the available water capacity in direct proportion to their volume unless the rocks are porous.

Organic matter increases the available water capacity. Each 1 percent of organic matter adds about 1.5 percent to available water capacity.

Bulk density plays a role through its control of the pore space that retains available water. High bulk densities for for agiven soil tend to lower the available water capacity.

Osmotic pressure exerted by the soil solution is 0.3 - 0.4 times the electrical conductivity in mmhos/cm. A significant reduction in available water capacity requires an electrical conductivity of more than 8 mmhos/cm.

Texture has a significant effect. Some guidelines follow, assuming intermediate bulk density and no rock fragments.

Textures	Fraction Available Water
Sands, and loamy sands and sandy loams in which the sand is not dominated by very fine sand	Less than 0.10
Loamy sands and sandy loams in which very fine sand is the dominant sand fraction, and loams, clay loam, sandy clay loam, and sandy clay	0.10 - 0.15
Silty clay, and clay	0.10 - 0.20
Silt, silt loam, and silty clay loam	0.15 - 0.25

The **rooting depth** affects the total available water capacity in the soil. A soil that has a root barrier at 20 inches and an available water fraction of 0.20 has 4 inches of available water capacity. Another soil, that has a lower available water fraction of 0.10, would, if the roots extended to a depth of 60 inches, have 6 inches of available water capacity. For shallow rooting crops, like onions, the available water below 1-2 feet has little significance. For deeper rooting crops, like corn, the available water at the greater depth is very important.

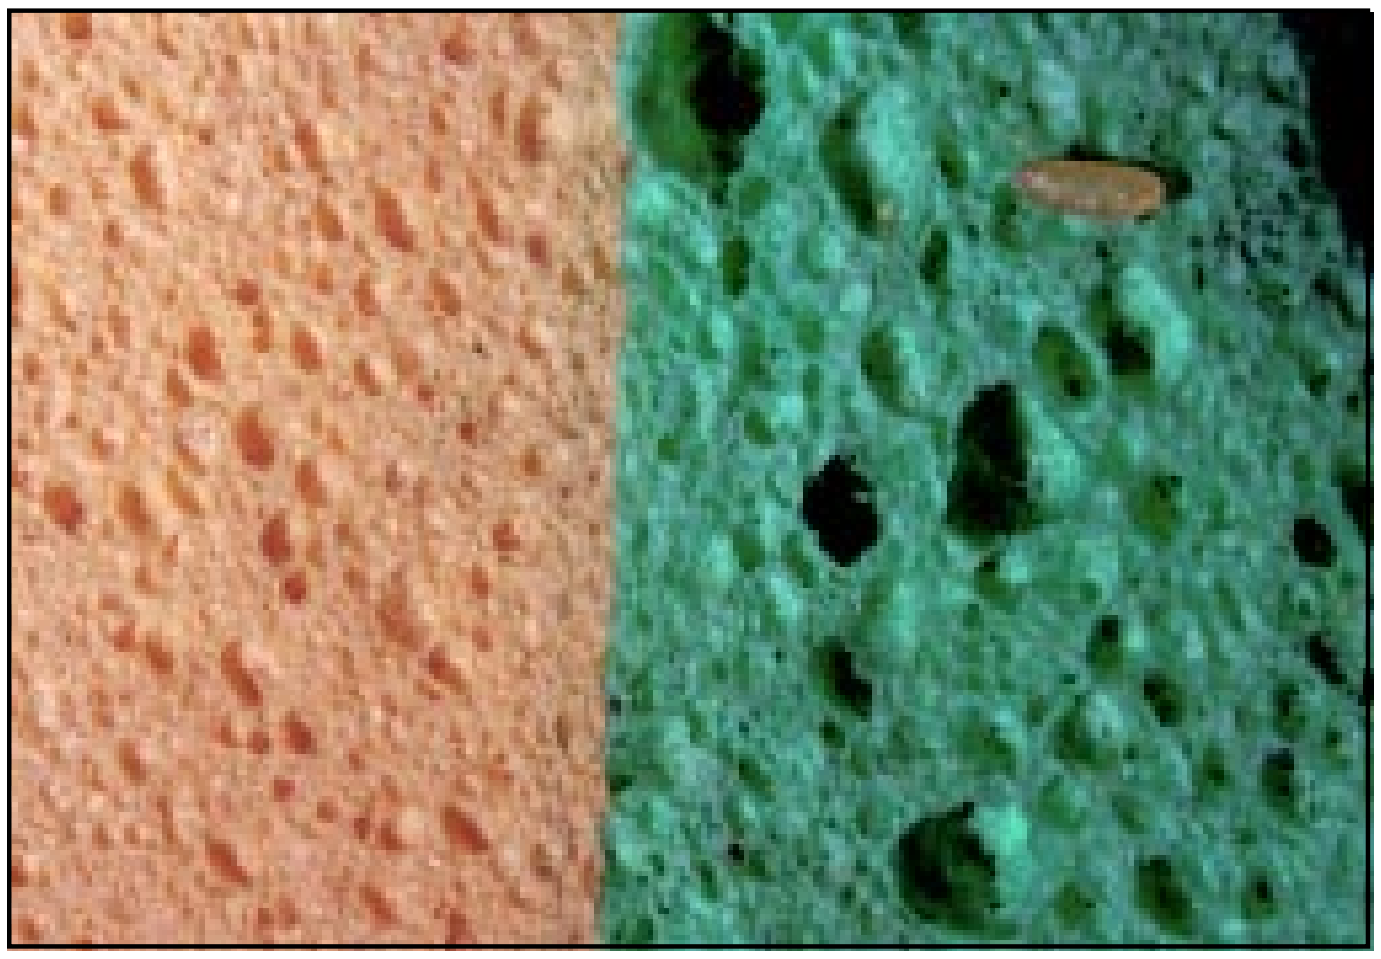

Figure 1: Pore size varies greatly between sponges.

Soil quality and available water

First, consider the difference between precipitation and evapotranspiration during the growing season. Second, decide what plants are involved. As indicated, some plants root less deeply than others.

Compare two soils that have different internal properties and climates selecting a crop that will extract water to a depth of 60 inches, unless there is a shallower root barrier.

Quantity		Soil Locations OK	Soil Locations ME
Rooting depth (in.)		30	60
Available water fraction	x	0.10	0.15
Available water amount (in.)	=	3.0	9.0
Evapotranspiration deficit (in./day)	÷	0.17	0.04
Time available water satisfies deficit (days)	=	18	222

* Evapotranspiration deficit is the monthly precipitation subtracted from monthly evapotranspiration. Calculate the average daily deficit for the month with the largest deficit.

(Prepared by the National Soil Survey Center in cooperation with the Soil Quality Institute, NRCS, USDA, and the National Soil Tilth Laboratory, Agricultural Research Service, USDA).

Soil quality with respect to available water is better for the soil from Maine (ME), because of both the internal properties and the lower evapotranspiration deficit.

Figure 2: Available water capacity is greater with small pore size.

Improving the available water

Apply organic matter to the surface or mix into the upper few inches to increase the available water fraction near the surface. Available water near the surface is especially important at the seedling stage while roots are very shallow.

Maintain salts below the root zone. Keep infiltration high, reduce evaporation with a residue cover, minimize tillage, avoid mixing the lower soil layers with the surface, and plant seeds and seedlings on the furrow edges.

Minimize compaction by reducing the weight of vehicles and the amount of traffic, especially when the soil is moist or wet. Break up compacted layers when needed by ripping, and effectively expand the depth of the soil and increase the available water capacity.

Visit our Web site:
www.nssc.nrcs.usda.gov